


HE-4

High Efficacy 4" Linear



LED

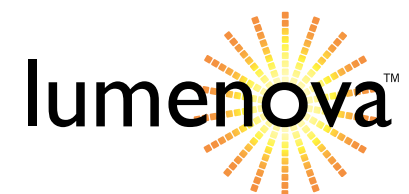

160 Greentree Drive, Suite 101 | Dover, DE 19904 | 888.224.3799 | www.lumenovaLED.com

Copyright © Lumenova™ Architectural Lighting. 2013 All rights reserved. LMB1-4/13.

Architectural

HE-4

The HE-4 architectural LED series from Lumenova™ delivers uniform, glare-free illumination and best-in-class efficacy (90+ lm/W) in a petite 4" linear profile. Available in 2', 3', 4', 6' or 8' lengths, fixtures can be installed individually or easily field-configured to form clean continuous rows, with no socket shadows. Mounting orientations include pendants, companion wall mounts, surface ceiling mounts and recessed ceiling mounts. Each is available with flush or regressed lens. Select from Standard Output or High Output lumen packages in 3000K, 3500K or 4000K, for use in direct, indirect or direct/indirect applications.

Standard HE-4 series luminaires are available to ship in 10-days. All Lumenova™ HE-4 series luminaires feature 100,000 hour life to L90, and are backed by an industry-best 10-year warranty.

lumen innovation

Lumenova™ is lumen innovation. Designed from the inside out, Lumenova™ begins with state-of-the-art solid state components. We carefully balance quantity and quality – delivering maximum lumen output using minimum input wattage, to achieve uniform, glare-free illumination in an energy efficient package. We insist on quality materials, such

as 6061-T6 aluminum extrusion, which provides optimum mechanical and thermal qualities in support of our advanced SSL components and optics. We utilize modular design features, which help keep product, installation and service costs low. And we deliver standard product in 10-days, backed by an industry-best 10-year warranty.



Performance

Select from two lumen packages, Standard Output or High Output. Both deliver best-in-class efficacy (90+ lm/W*) and are available in 3000K, 3500K or 4000K CCT, with best-in-class CRI of 87.

Dimming

The 0-10V driver delivers 100% to 1% dimming (100-277V), or specify Triac dimming (120V).

Smart Electrical Design

In the unlikely event that an LED board or connector should fail, our unique system prevents over-current to the remaining LED boards, thus avoiding degradation of system life. This smart design feature, along with others, makes our industry-best 10-year warranty possible.

Smart Mechanical Design

A snap-in optical chamber and lens, along with modular access to the electronic driver and LED boards, makes installation and service quick and easy.

* Based on 4000K.

Lengths

2', 3', 4', 6' and 8' individual lengths, or continuous rows to within 1'. Rows are field-configurable using internal joiners to form seamless connections, with no socket shadows. Contact the factory for custom individual or continuous row lengths to within 1".

Flush or Regressed Lens

All HE-4 individual fixtures and continuous rows are available with your choice of flush or regressed lens. The continuous LED light source insures a smooth gradient of illumination with no socket shadows. The white, frosted acrylic lens provides 87% transmission and 99% diffusion.

10-Day Delivery

Standard product model and option combinations are available to ship in 10-days.

10-Year Warranty

All Lumenova™ HE-4 luminaires feature 100,000 hour life to L90, and are backed by an industry-best 10-year warranty.

Specifications subject to change without formal notice.

solutions



Pendants

Pendants are available in five different standard lengths or in continuous rows. Suspension options include aircraft cable, rigid stems or swivel stems.



Wall

Companion surface mounted wall luminaires are available in five different standard lengths or in continuous rows.



Ceiling – surface

Companion surface mounted ceiling luminaires are available in five different standard lengths or in continuous rows.



Ceiling – recessed

Recessed mounted ceiling luminaires are suitable for use in grid ceilings or in drywall ceilings.

